


Central frequency - 307.2 MHz

Passband - 4.8 MHz

Complies with Directive 2002/95/EC (RoHS)

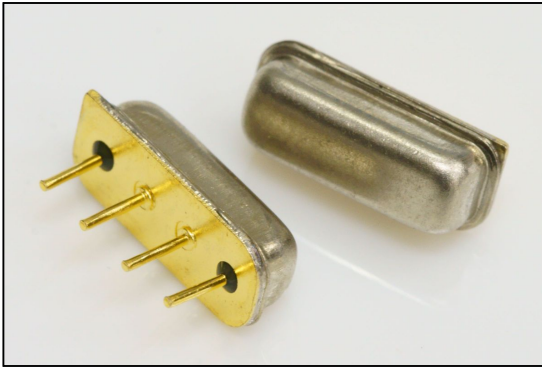


Looking for information on other SAW devices at: <http://aec-pro.com/filters.php>

Designed by: Ltd. AEC Design

Mass production: Ltd. AEC

TYPICAL PERFORMANCE

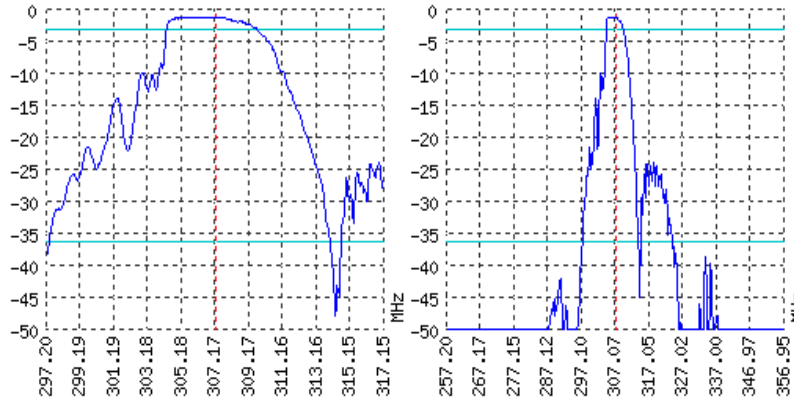

SPECIFICATIONS

| Parameter                  | Unit | Low frequency   | Typical              | Upper frequency |
|----------------------------|------|-----------------|----------------------|-----------------|
| Central frequency          | MHz  | -               | 307.2                | -               |
| Insertion loss             | dB   | -               | Not more 2           | -               |
| Bandwidth edge -2dB level  | MHz  | Not more 305    | -                    | Not less 309.4  |
| Bandwidth edge -35dB level | MHz  | Not less 295.95 | -                    | Not more 324.5  |
| Amplitude ripple           | dB   | -               | Not more 2           | -               |
| Group Delay Ripple         | ns   | -               | -                    | -               |
| Ultimate rejection         | dB   | -               | 35                   | -               |
| Operating temperature      | °C   | -55             | 22                   | +85             |
| Substrate                  | -    | -               | Lithium tantalate 36 | -               |

Notes:

- For information. Order a ЦПАР.433561.53 TY for a complete and updated data.
- Specification valid for measurements in AEC test fixture.

CASE SIP4M


MATCHING



<http://aec-pro.com/cases.php>



| DIMENSIONS (mm) |      |
|-----------------|------|
| A               | 10.8 |
| B               | 4.3  |
| C               | 3.3  |
| D               | 0.45 |
| E               | 1.59 |
| F               | 2.15 |
| G               | 3.2  |
| H               | 2.54 |



| Input 50 Ohm |   | Output 50 Ohm |   |
|--------------|---|---------------|---|
| L1, nH       | - | L2, nH        | - |
| C1, pF       | - | C2, pF        | - |

Signal input: 1  
Signal output: 4  
Ground: other pin

\*Matching condition depends on PCB layout.

Recommendations:

- See the relevant ЦПАР for maximum permissible input signal power in the bandwidth.
- Input signal amplitude in the stop band is limited to 5 V.
- DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.

**AEK** Ltd. AEC Mass production. Acceptance - QCID.  
aec@aec-pro.com | tel./fax (812)252-93-70

**AEC** Ltd. AEC Design Design and production. Military acceptance.  
admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69