

Central frequency - 157.12 MHz

Passband - 2.7 MHz

Complies with Directive 2002/95/EC (RoHS)




Looking for information on other SAW devices at: <http://aec-pro.com/filters.php>

Designed by: Ltd. AEC Design

Mass production: Ltd. AEC

TYPICAL PERFORMANCE

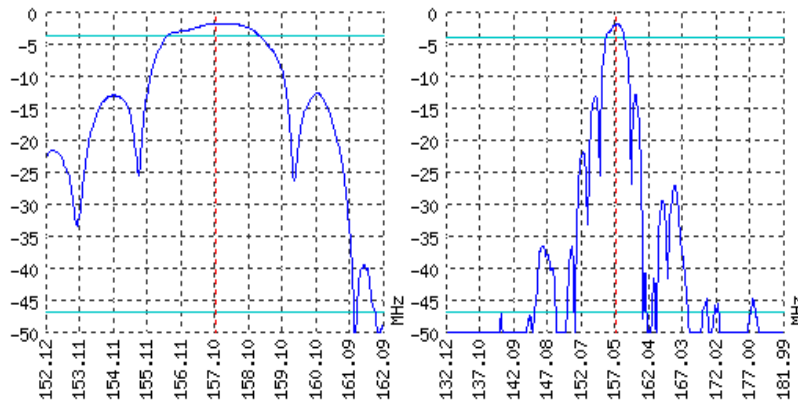

SPECIFICATIONS

| Parameter                  | Unit | Low frequency   | Typical             | Upper frequency |
|----------------------------|------|-----------------|---------------------|-----------------|
| Central frequency          | MHz  | -               | 157.12              | -               |
| Insertion loss             | dB   | -               | Not more 2          | -               |
| Bandwidth edge -2dB level  | MHz  | Not more 155.89 | -                   | Not less 158.31 |
| Bandwidth edge -45dB level | MHz  | Not less 137.35 | -                   | Not more 176.56 |
| Amplitude ripple           | dB   | -               | Not more 2          | -               |
| Group Delay Ripple         | ns   | -               | -                   | -               |
| Ultimate rejection         | dB   | -               | 45                  | -               |
| Operating temperature      | °C   | -55             | 22                  | +85             |
| Substrate                  | -    | -               | Lithium niobate 128 | -               |

Notes:

- For information. Order a ЦПАР.433561.22 TY for a complete and updated data.
- Specification valid for measurements in AEC test fixture.

CASE H 04.16-2BH

MATCHING



<http://aec-pro.com/cases.php>



| DIMENSIONS (mm) |     |
|-----------------|-----|
| A               | 7.8 |
| B               | 7.4 |
| C               | 2.9 |
| D               | 0.2 |
| E               | 1   |
| F               | 1   |
| G               | 0.9 |
| H               | 0.3 |
| J               | 3   |



| Input 50 Ohm |   | Output 50 Ohm |   |
|--------------|---|---------------|---|
| L1, nH       | - | L2, nH        | - |
| C1, pF       | - | C2, pF        | - |

Signal input: 3,4  
 Ground (input): 2,5  
 Signal output: 11,12  
 Ground (output): 10,13  
 Ground: other pin

\*Matching condition depends on PCB layout.

Recommendations:

- See the relevant ЦПАР for maximum permissible input signal power in the bandwidth.
- Input signal amplitude in the stop band is limited to 5 V.
- DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.

**AEK** Ltd. AEC Mass production. Acceptance - QCID.  
[aec@aec-pro.com](mailto:aec@aec-pro.com) | tel./fax (812)252-93-70

**AEC** Ltd. AEC Design Design and production. Military acceptance.  
[admin@aec-design.com](mailto:admin@aec-design.com) | tel.(812)377-04-26 | fax.(812)364-60-69